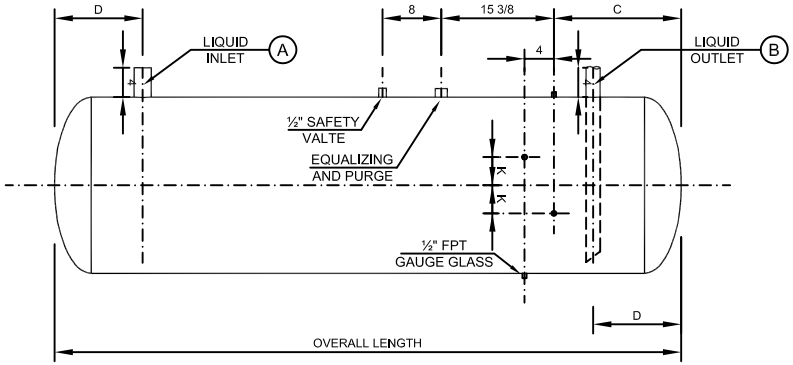



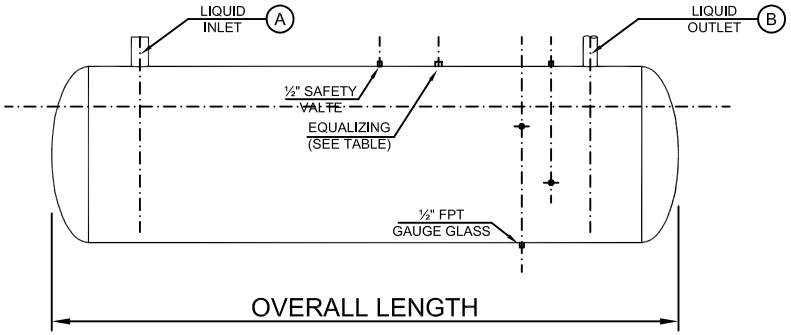

VESSEL CONSTRUCTED TO ASME, SECTION VIII, DIV I
PARTIAL X-RAY. A515 GR 70 MATERIAL
CONNECTIONS 2". & LARGER ARE WELD
SAFETY VALVE SIZED FOR VILTER AF VALVE
ALL CONNECTIONS NOT WELD ARE FPT

DIA. & OVERALL	PART NUMBER	LBS. A MM. @ 70°F 85% FULL	BARE WEIGHT LBS	DESIGN WIEGHT LBS	A LIQ. Inlet	B LIQ. Inlet	C	D	E	LGHT GUARD	LGHT GLASS	H	J	K	EQUAL & PURGE
36"x12FT	A67397A	2600	1830	5100	3	2 ½	26	18	27 ½	24 ¾	27	21	½ x 19	5 ¾	1
36"x14FT	A67397B	3060	2150	6000											
36"x16FT	A67397C	3520	2400	7000											
36"x18FT	A67397D	3940	2700	7600											
42"x12FT	A67398A	4210	2500	7800	4	3	26	19	27 ½	24 ¾	27	24 ¾	½ x 22 ½	2 ¾	1
42"x14FT	A67398B	4740	2830	8760											
42"x16FT	A67398C	5500	3200	10200											
42"x18FT	A67398D	6110	3500	11200											
48"x12FT	A67399A	5340	3180	10200	5	4	29	21	31 ½	28 ¾	31	27 ½	½ x 25 ½	3 ¾	1 ¼
48"x14FT	A67399B	6190	3620	11600											
48"x16FT	A67399C	7040	4060	13000											
48"x18FT	A67399D	7810	4500	14500											

STANDARD AMMONIA LIQUID RECIEVERS

VILTER MFG. CORP. MILWAUKEE

DR. BY: GMR
CHKD. BY

DATE: 1/12/2001

T60340-A